

Sanicondens Best Flat



4.5 m
50 m



PRODUCT BENEFITS

- Compact solution with complete installation kit provided
- Low inlet at 47mm for floor standing boiler
- Integrated neutralisation system to protect pipes from acid attacks

CONNECTIONS

← Discharge diameter (int.) : 10 mm


→ Inlet diameter DN : 28 mm



PACK CONTAINS

Sanicondens Best Flat, wall mounting, non-return valve, fixing screw, 1 inlet adapter, 1 outlet adapter (Ø 50 mm), 1 drain hose 5 m int. Ø: 10 mm, 1 power cable 1.5 m, 1 alarm cable, 2 strands 1.5 m, 1.2 kg neutralisation granules

CURVE

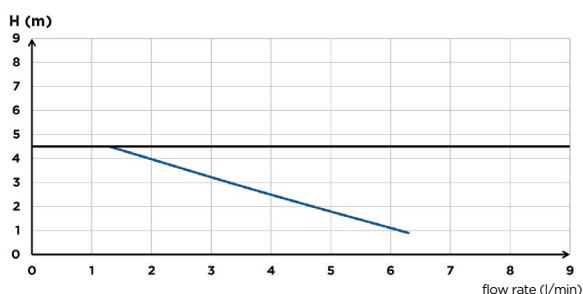

— recommended max height: 4.5 m

TECHNICAL FEATURES

| | |
|-------------------------------------|----------------------|
| Max. power of boiler | Oil 50, Gas 80 kW |
| Number of inlets | 2 |
| Inlet diameter DN | 28 mm |
| Discharge diameter (int.) | 10 mm |
| Tank volume | 3.5 L |
| Max. incoming temperature | 80°C (S3 15%) |
| Voltage / Frequency | 220-240 V / 50-60 Hz |
| Max. power consumption | 60 W |
| Maximum current | 0.52 A |
| IP Rating | IP24 |
| Electrical class | I |
| Noise level | < 45 dB(A) |
| Identification and logistics | |
| Gross weight | 4.7 kg |
| EAN code | 3308815081410 |
| Product code | 1142 |

OPTIONAL EXTRAS

Replacement granules
Barcode: 3308815011134
Product code: SACHGRANULE



DIMENSIONS

